

straightcurve®


# Specifications

## 240mm Flexline™

LENGTH 2160mm | TOP THICKNESS 8mm

### FINISHES


- Galvanised Steel
- Weathering Steel

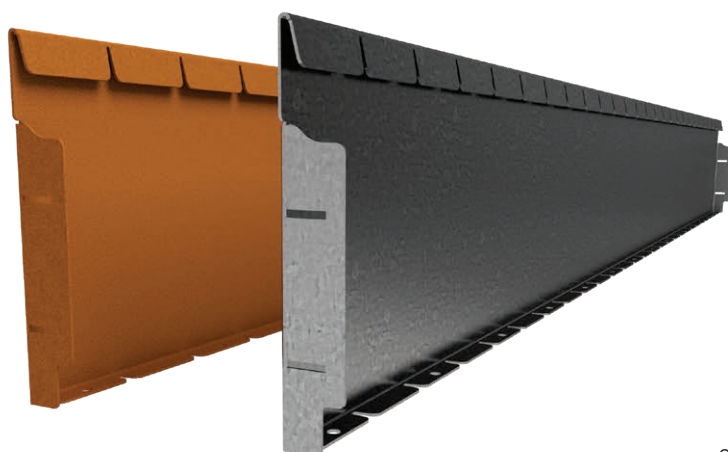

Steel plate thickness 2mm

### SOLD AS SET INCLUDING

- 1 x joining set (2 x wedge, 2 x slider, 1 x joint bracket)
- 5 x galvanised spikes, 300mm long

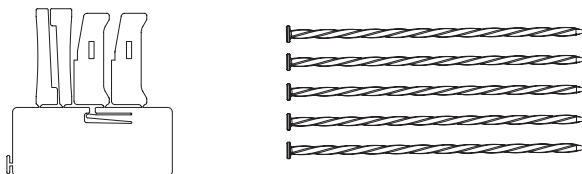


### ADDITIONAL ACCESSORIES

#### REQUIRED

- Small anchor set (2 x Tek screws 12G x 16mm)

#### OPTIONAL

- Corner piece (arm lengths: 255mm)
- Joining sleeve (6 x Tek screws 12G x 16mm)
- Hard surface fixing bracket (2 x Tek screws 12G x 16mm)

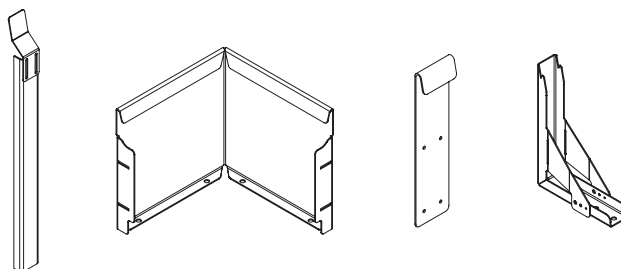

# Installation guide 240mm Flexline™

Scan me for  
Video installation!



Scan the code or follow the link below for installation video.  
240mm Flexline™ installation video

## PREPARATIONS

Mark line and level or trench as required ready for install.

## CORNERS

Standard corners are available for purchase\*, these include the standard joining set. These can be opened or closed further with forceful bending to achieve different angle corners. You can also choose to make your own. To do this score a line down the back of the edge and create a sufficient opening (5-7mm) in the folded lip at the top and cut out part of the foot at the bottom with your angle grinder to allow space for bending. Bend strongly by hand; using a block of wood close to the fold helps.

## ANCHOR SETS

Anchor set posts are driven in as a stake behind the edge before attaching to the edge with the fix lip. It is recommended to use two of these per edge. If you're making a tight 1.37m diameter ring with two lengths it is self supporting so doesn't need any anchor sets!

## HARD SURFACE FIXING

If you need to secure the edge to hard surfaces, the hard surface fixing bracket can be used. It's compatible with fixing pins or can be bolted down. (Options sold separately)

## JOINING SLEEVES

Shortening a length is sometimes a requirement. The joining sleeve is used to connect the two edges when this occurs. These are fixed to the panel front with screws through the guide holes in the sleeve.

## TIP


If installing with a friend connect two panels together first (facedown on a flat surface) then position.

## STANDARD RING SIZES


Connecting edge lengths makes standard ring sizes, use join sleeve for non-standard diameters greater than 1.5m

	Lengths	Diameter
Connecting edge lengths	2	1.37m
makes standard ring sizes, use	3	2.06m
join sleeve for non-standard	4	2.75m
diameters greater than 1.5m	5	3.44m


### STEP 1 - JOIN




### STEP 2 - FLEX




### STEP 3 - PEG




### STEP 4 - STAKE




### PRE-MADE CORNER\*



### MAKE CORNER - NOTCH/SCORE WITH GRINDER



### TIGHT RADIUS - STRAP



### TIGHT RADIUS - STRAP

